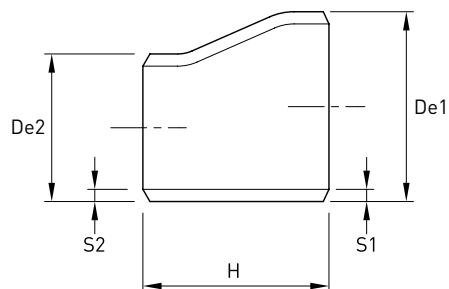


Riduzione eccentrica *Welded*

Norme: ASME B16.9 – ASTM A403 WP-W

Materiale: Aisi 304L EN 1.4307 - Aisi 316L EN 1.4404

cod. **316W**

De1 x De2 mm	S1 x S2 mm	Dimensioni	H mm	Stock	Peso kg
141,30 x 88,90	3,40 x 3,05	5" x 3" SCH 10S	127	D	1,45
141,30 x 88,90	6,55 x 5,49	5" x 3" SCH 40S	127	D	2,85
141,30 x 114,30	3,40 x 3,05	5" x 4" SCH 10S	127	D	1,49
141,30 x 114,30	6,55 x 6,02	5" x 4" SCH 20S	127	D	2,98
168,28 x 88,9	3,40 x 3,05	6" x 3" SCH 10S	140	D	1,82
168,28 x 88,9	7,11 x 5,49	6" x 3" SCH 40S	140	D	3,98
168,28 x 114,30	3,40 x 3,05	6" x 4" SCH 10S	140	D	1,95
168,28 x 114,30	7,11 x 6,02	6" x 4" SCH 40S	140	D	4,08
168,28 x 141,30	3,40 x 3,40	6" x 5" SCH 10S	140	D	2,05
168,28 x 141,30	8,18 x 7,11	6" x 5" SCH 40S	140	D	4,18
219,08 x 114,30	3,76 x 3,05	8" x 4" SCH 10S	152	D	3,02
219,08 x 114,30	8,18 x 6,02	8" x 4" SCH 40S	152	D	6,55
219,08 x 141,30	3,76 x 3,40	8" x 5" SCH 10S	152	D	3,08
219,08 x 141,30	8,18 x 6,55	8" x 5" SCH 40S	152	D	6,70
219,08 x 168,30	3,76 x 3,40	8" x 6" SCH 10S	152	D	3,19
219,08 x 168,30	8,18 x 7,11	8" x 6" SCH 40S	152	D	6,94
273,05 x 168,28	4,19 x 3,40	10" x 6" SCH 10S	178	D	5,00
273,05 x 168,28	9,27 x 7,11	10" x 6" SCH 40S	178	D	11,12
273,05 x 219,08	4,19 x 3,76	10" x 8" SCH 10S	178	D	5,25
273,05 x 219,08	9,27 x 8,18	10" x 8" SCH 40S	178	D	11,56
323,85 x 168,28	4,57 x 3,40	12" x 6" SCH 10S	203	D	6,58
323,85 x 168,28	9,53 x 7,11	12" x 6" SCH 40S	203	D	12,80
323,85 x 219,08	4,57 x 3,76	12" x 8" SCH 10S	203	D	7,67
323,85 x 219,08	9,53 x 8,18	12" x 8" SCH 40S	203	D	15,98
323,85 x 273,05	4,57 x 4,19	12" x 10" SCH 10S	203	D	7,98
323,85 x 273,05	9,53 x 9,27	12" x 10" SCH 40S	203	D	16,63