


Tubo tondo welded

Norme: ASME B36.19 – ASTM A312 WP-W

Materiale: Aisi 304L EN 1.4307 - Aisi 316L EN 1.4404

cod. 202W

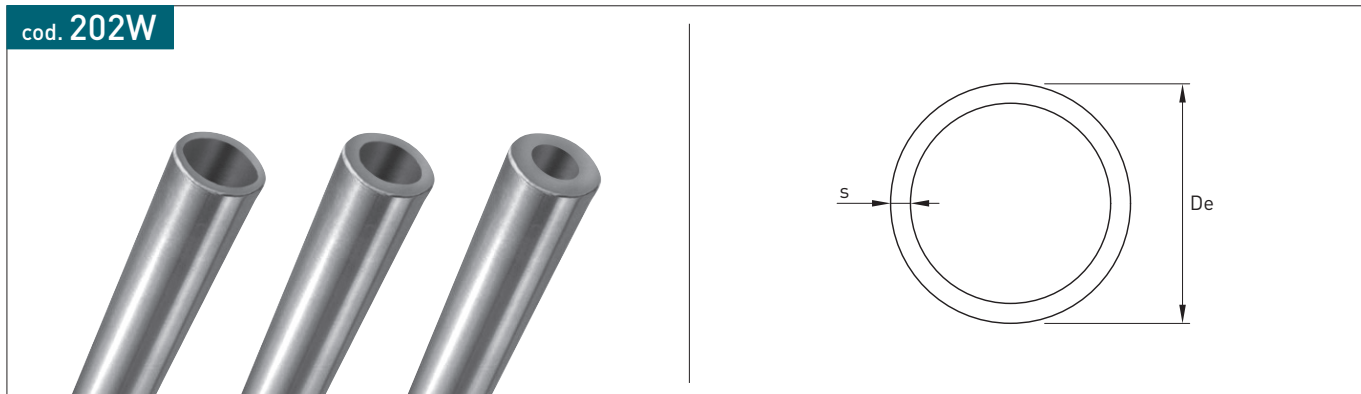

De x Spessore (s) mm	Dimensioni	Stock	Peso kg/m
21,34 x 2,11	1/2" SCH 10S	R	1,02
21,34 x 2,77	1/2" SCH 40S	R	1,29
26,67 x 2,11	3/4" SCH 10S	R	1,64
26,67 x 2,87	3/4" SCH 40S	R	1,30
33,40 x 2,77	1" SCH 10S	R	2,12
33,40 x 3,38	1" SCH 40S	R	2,54
42,16 x 2,77	1.1/4" SCH 10S	R	2,73
42,16 x 3,56	1.1/4" SCH 40S	R	3,44
48,26 x 2,77	1.1/2" SCH 10S	R	3,16
48,26 x 3,68	1.1/2" SCH 40S	R	4,11
60,33 x 2,77	2" SCH 10S	R	3,99
60,33 x 3,91	2" SCH 40S	R	5,52
73,03 x 3,05	2.1/2" SCH 10S	R	5,34
73,03 x 5,16	2.1/2" SCH 40S	R	8,77
88,90 x 3,05	3" SCH 10S	R	6,56
88,90 x 5,49	3" SCH 40S	R	11,47
114,30 x 3,05	4" SCH 10S	R	8,50
114,30 x 6,02	4" SCH 40S	R	16,32
141,30 x 3,40	5" SCH 10S	R	11,74
141,30 x 6,55	5" SCH 40S	R	22,10
168,28 x 3,40	6" SCH 10S	R	14,04
168,28 x 7,11	6" SCH 40S	R	28,70
219,08 x 3,76	8" SCH 10S	R	20,27
219,08 x 8,18	8" SCH 40S	R	43,20
273,05 x 4,19	10" SCH 10S	R	28,21
273,05 x 9,27	10" SCH 40S	R	61,22
323,85 x 4,57	12" SCH 10S	R	36,54
323,85 x 9,52	12" SCH 40S	R	75,01
355,60 x 4,78	14" SCH 10S	R	41,31
406,40 x 4,78	16" SCH 10S	R	47,15
457,20 x 4,78	18" SCH 10S	R	53,13
508,00 x 5,54	20" SCH 10S	R	68,52
609,6 x 6,35	24" SCH 10S	R	94,45