


Collare pressato PN 10-16

Norme: EN1092-1 TYPE 37

Materiale: Aisi 304L EN 1.4307 - Aisi 316L EN 1.4404

cod. 317

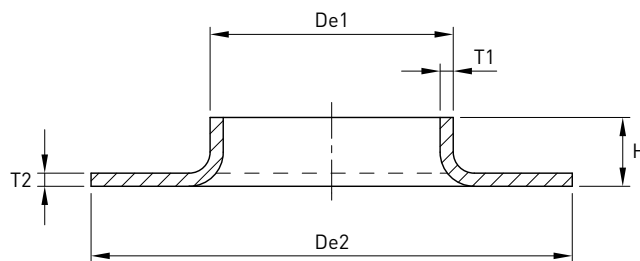

DN	DN inch	De1 mm	De2 mm	H mm	T2 mm	T1 mm	PN	Stock	Peso kg/m
15	1/2"	21,3	45	7	2,5	2	10/16	R	0,03
20	3/4"	26,9	58	8	3	2	10/16	R	0,06
25	1"	33,7	68	10	3	2	10/16	R	0,08
32	1 1/4"	42,4	78	12	3	2	10/16	R	0,1
40	1 1/2"	48,3	88	15	3	2	10/16	R	0,13
50	2"	60,3	102	20	3	2	10/16*	R	0,24
50	2"	60,3	102	20	4	3,2	10/16	R	0,23
65	2 1/2"	76,1	122	20	3	2	10/16*	R	0,24
65	2 1/2"	76,1	122	20	4	3,2	10/16	R	0,32
80	3"	88,9	138	25	3	2	16*	R	0,33
80	3"	88,9	138	25	4	3,2	16	R	0,44
100	4"	114,3	158	25	3	2	10*	R	0,37
100	4"	114,3	158	25	4	3,2	10/16	R	0,49
125	5"	139,7	188	25	3	2	10*	R	0,40
125	5"	139,7	188	25	4	3,2	10	R	0,64
125	5"	139,7	188	25	5	4	16	R	0,90
150	6"	168,3	212	25	3	2	10*	R	0,52
150	6"	168,3	212	25	4	3,5	10	R	0,73
150	6"	168,3	212	25	5	4	16	R	0,93
200	8"	219,1	268	30	3	2	10*	R	0,67
200	8"	219,1	268	30	4	3	10	R	1,06
200	8"	219,1	268	30	5	4,5	16	R	1,36

* In accordo alla norma EN 13480