


# Flangia filettata collare PN16

Norme: EN1092-1 TYPE 13B - ASTM A182

Materiale: Aisi 304L EN 1.4307 - Aisi 316L EN 1.4404

cod. 363F

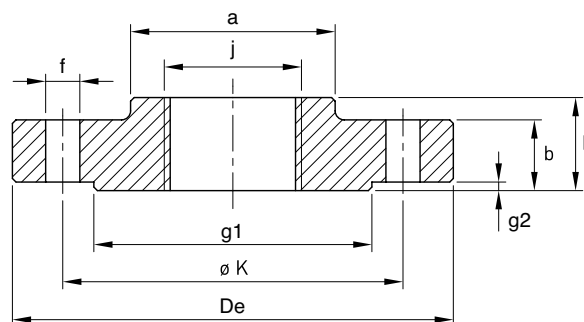

DN	DN inch	Flangia mm					Collarino	Gradino mm		Foratura			Stock	Peso kg
		j	ø K	De	h	b		a mm	g1	g2	f mm	Vite		
15	1/2" G	21,3	65	95	22	16	35	45	2	14	M12	4	D	0,800
20	3/4" G	26,9	75	105	26	18	45	58	2	14	M12	4	D	1,130
25	1" G	33,7	85	115	28	18	52	68	2	14	M12	4	D	1,370
32	1" 1/4 G	42,4	100	140	30	18	60	78	2	18	M16	4	D	1,990
40	1" 1/2 G	48,3	110	150	32	18	70	88	3	18	M16	4	D	2,350
50	2" G	60,3	125	165	28	18	84	102	3	18	M16	4	D	2,430
65	2" 1/2 G	76,1	145	185	32	18	104	122	3	18	M16	4	D	3,180
80	3" G	88,9	160	200	34	20	118	138	3	18	M16	8	D	4,120
100	4" G	114,3	180	220	40	20	140	158	3	18	M16	8	D	4,470
125	5" G	139,7	210	250	44	22	168	188	3	18	M16	8	R	6,630
150	6" G	168,3	240	285	44	22	195	212	3	22	M20	8	R	8,490